

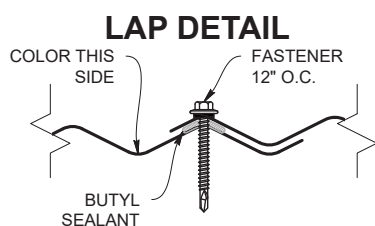
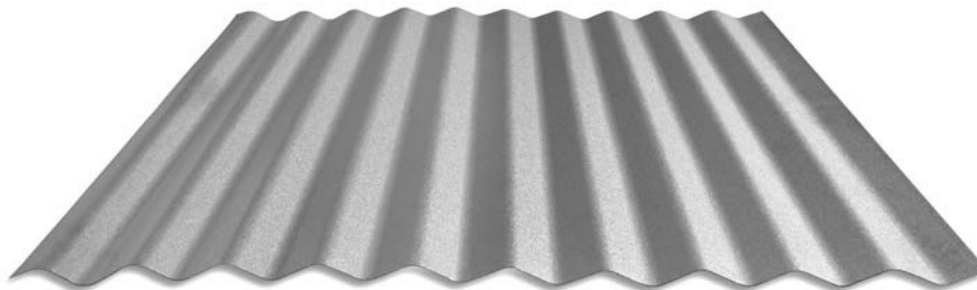



34<sup>5</sup>/<sub>8</sub>" & 37<sup>1</sup>/<sub>4</sub>" Single-lap roof & wall coverage

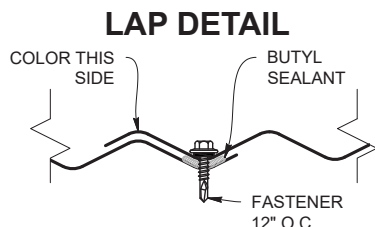

**ROOF & WALL PROFILE**

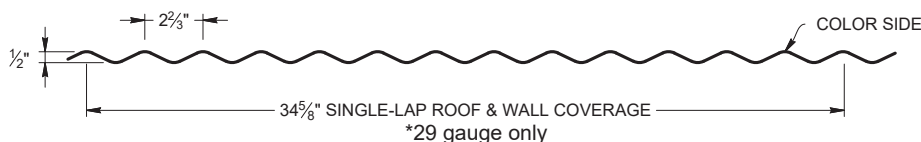

**ROOF & WALL PROFILE**

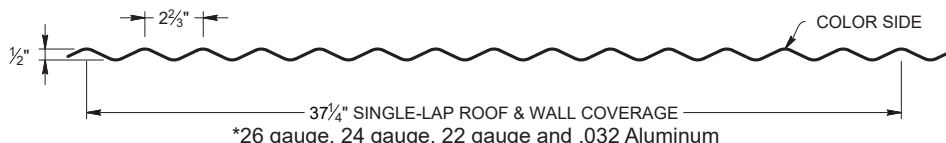

**KEY FEATURES**

- 29, 26, 24 and 22 Tru-Gauge™ and .032" and .040" Aluminum
- 22ga Rusteel Plus™ (A606)
- 3:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 30'  
(For longer length panels, please inquire)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass panels available in white, 24" wide, 12' length
- Manufactured in Salem OR
- OverEZee™ Retro-fit systems available

**TESTING**

- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55

Gauge	Color	Panel Width
29ga, 26ga	Bare Galvanized/AZ50	24" (Oregon only)
29ga	Painted	34-5/8"
26ga, 24ga, 22ga	Painted	37-1/4"
.032, .040 Aluminum	Painted	37-1/4"

## MATERIAL SPECIFICATIONS

- 24 Tru-Gauge™ Kynar 500® Painted Steel .0236" (Thickness prior to painting)
- ▲ 22 Tru-Gauge™ Kynar 500® Painted Steel .029" (Thickness prior to painting)
- ◆ .032" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 and 22 Tru-Gauge™ bare Zincalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- .032" & .040" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ Bonderized
- 22 gauge Rusteel Plus™ (A606) (No finish warranty – no perforation warranty)
- Kynar 500® and substrate testing data available (See website)

## SMP MATERIAL SPECIFICATIONS

- 26 Tru-Gauge™ ARMORTECH™ Painted Steel .019" (Thickness prior to painting)


## STANDARD COOL ARMORTECH™ SMP COLORS 40-Year Residential Manufacturer's Limited Warranty




## STANDARD COOL KYNAR 500® COLORS

40-Year Residential / 20 and 30 Year Commercial Manufacturer's Limited Warranty


- ▲ .22 Tru-Gauge™
- ◆ .032 Aluminum

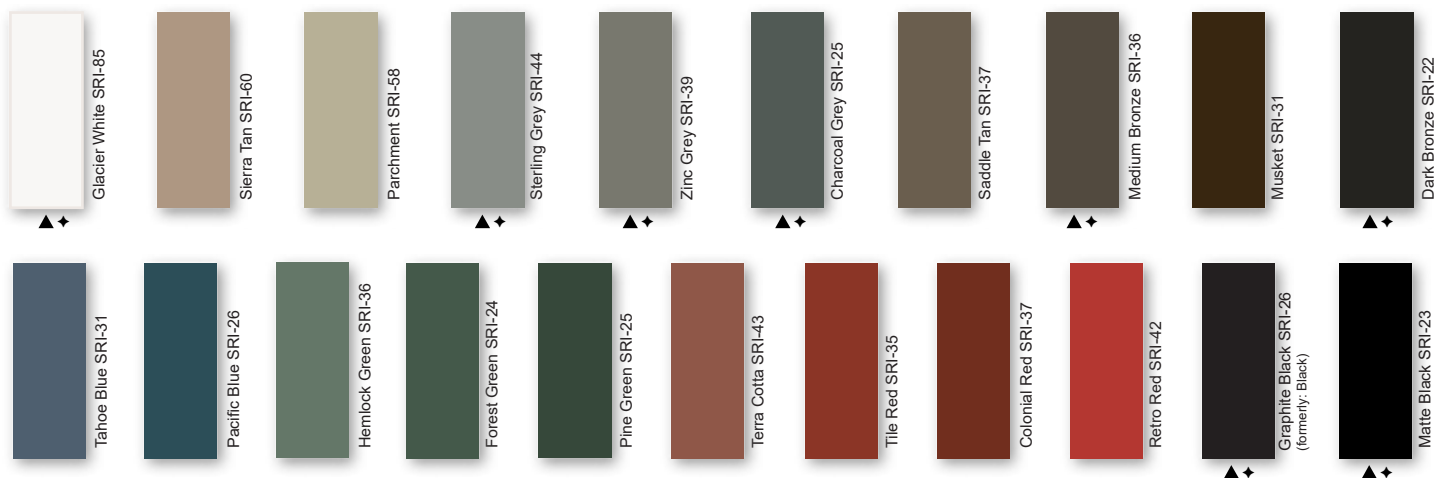

## PREMIUM METALLIC COOL KYNAR® COLORS

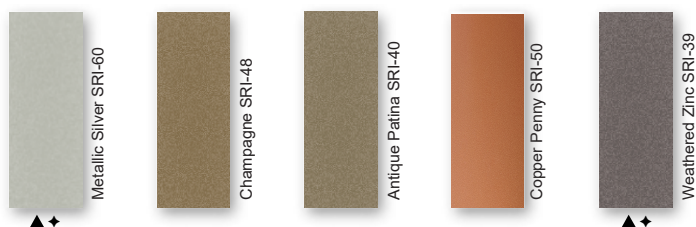

## SPECIALIZED MATERIAL

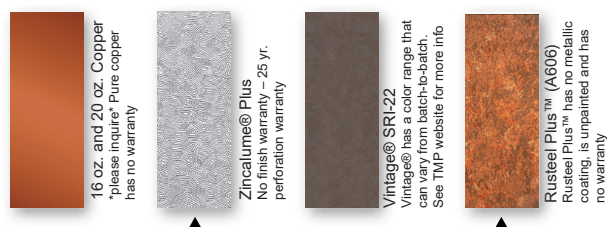

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.  
SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing. \*\*\*Oil canning is not a cause for material rejection\*\*\*



Rev. Date 09-24