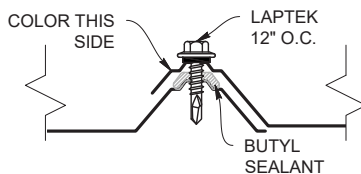


WALL PROFILE LAP




ROOF & WALL PROFILE



KEY FEATURES

- 29 and 26 Tru-Gauge™
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 45'
(For longer length panels, please inquire)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Salem OR and Riverside CA
- OverEZee™ retro-fit systems available

TESTING

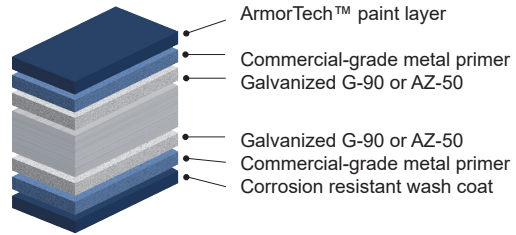
-  Code compliance UL Evaluation Report
UL ER #25913-01
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM E330 - Positive structural uniform static air pressure
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zinalume/Galvalume AZ-50/55

MATERIAL SPECIFICATIONS

- 29 gauge ArmorTech™ Painted Steel .015" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 26 gauge ArmorTech™ Painted Steel .019" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 29 & 26 gauge bare Zinalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- 29 & 26 gauge bare G-90 Galvanized (No finish warranty – 25 yr. perforation warranty)


























KEY FEATURES

- 22 Standard Colors, Zinalume® Plus and Galvanized G-90
- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling



40-Year Residential Manufacturer’s Limited Warranty

STANDARD COOL ARMORTECH™ SMP COLORS

 Polar White SRI-90 <i>(new color, inquire)</i>	 Glacier White SRI-85	 Stone White SRI-71	 Ivory SRI-68	 Light Stone SRI-68	 Sandstone SRI-55	 Hickory SRI-48
 Ash Grey SRI-58	 Sand Gold SRI-61	 Desert Brown SRI-24	 Cocoa Brown SRI-27	 Kodiak Brown SRI-22	 Weathered Copper SRI-24	 Black SRI-24
 Sterling Grey SRI-45	 Charcoal Grey SRI-25	 Sage Green SRI-31	 Forest Green SRI-32	 Pine Green SRI-29	 Tahoe Blue SRI-25	 Pacific Blue SRI-25
 Tile Red SRI-32	 Copper Penny SRI-60	 Zinalume® Plus SRI-65 No finish warranty – 25 yr. perforation warranty	 Galvanized G-90 No finish warranty – no perforation warranty	<p>These printed chips provide a close representation of the colors. Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***</p>		



Rev. Date 09-24